



EXIT / EXIT CG-S

EXIT N

Technical data

EXIT | EXIT CG-S | EXIT N

Marking to 94/9/EC (new standard – applies for)	Ex II 2 G EEx e m Ib IIC T6/T5/T4 / Ex II 2 D IP66 T60 °C Ex II 2 G Ex e Ib m IIC T4/T5/T6 Ex II 2 D Ex tD A21 IP66 T80 °C
EC-Type Examination Certificate	PTB 02 ATEX 2111
IECEx Certificate of Conformity	IECEx BK1 06.0003
Marking accd. to IECEx	Ex emib IIC T4/T5/T6 Ex tD A21 IP66 T60 °C
Permissible ambient temperature	-20 °C up to +40°C / 50 °C (EXIT N: specified data +5 °C up to 35 °C)
Rated current	DC: 220 V = 20 mA, 110 V = 40 mA
Frequency	0 up to 50/60 Hz
Circuit	elektronic power supply
Connecting terminals	3 x loop terminal 2.5 mm ²
Lamp/Illuminant	high output-LEDs, white
Viewing distance	up to 25 m
Degree of protection accd. EN 60529	IP66
Cable glands/gland plates/enclosure drilling	1 x Ex e-cable gland M20 x 1.5 (plastic) / 1 x Ex e-screw plug M20 x 1.5
Dimensions (L x W x H)	340 x 150 x 75 mm
Type of mounting	wall installation
Enclosure material	polycarbonat
Enclosure colour	grey, RAL 7035
Protective cover/protective bowl	polycarbonat

EXIT | EXIT 24 V


Temperature class	T6: Ta max. +40 °C, T5: Ta max. +50 °C
Rated voltage 1	110 V - 277 V AC
Rated voltage 2	110 V - 250 V DC
Rated voltage (EXIT 24V)	12 - 24 V (EXIT 24 V)
Rated power consumption	approx. 6 VA
Weight	2 kg

EXIT CG-S

Temperature class	T6: Ta max. +40 °C, T5: Ta max. +50 °C
Rated voltage 1	220 V - 254 V AC
Rated voltage 2	195 V - 250 V DC
Rated power consumption	approx. 6 VA
Weight	2.2 kg

EXIT N


Temperature class	T5: Ta max. +40 °C, T4: Ta max. +50 °C
Rated voltage 1	110 V - 277 V AC
Rated voltage 2	110 V - 250 V DC
Rated power consumption	approx. 8 VA
Battery	NC-Akku 12 V/600 mAh
Rated emergency operating duration	3 h (specified data +5 °C up to +35)
Charging duration (Cap. >90 %)	28 h
Weight	2.5 kg

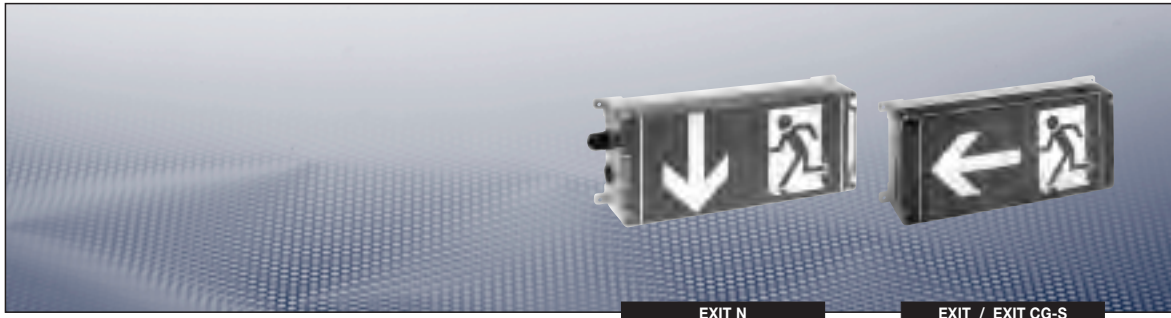

Ordering details

Type	Scope of delivery ¹⁾	Ordering Code
EXIT		
	including cover with silk-screen pictogram PR	1 2191 000 _01
	including cover with silk-screen pictogram PL	1 2191 000 _02
	including cover with silk-screen pictogram PU	1 2191 000 _03
	including cover, clear, without pictogram	1 2191 000 _04
EXIT CG-S		
	including cover with silk-screen pictogram PR	1 2191 020 _01
	including cover with silk-screen pictogram PL	1 2191 020 _02
	including cover with silk-screen pictogram PU	1 2191 020 _03
	including cover, clear, without pictogram	1 2191 020 _04
EXIT N		
	including cover with silk-screen pictogram PR	1 2191 030 _01
	including cover with silk-screen pictogram PL	1 2191 030 _02
	including cover with silk-screen pictogram PU	1 2191 030 _03
	including cover, clear, without pictogram	1 2191 030 _04

¹⁾ Other silk-screen pictograms or inscriptions available on request



Dimension drawing | Pictograms

EXIT / EXIT CG-S / EXIT N

PL PR PU

Escape sign acc. to latest standards

Dimensions in mm

1
2
3
4
5
6
7
8
9
10
11
12