

Weatherproof Strobe Light BLE 15

High performance strobe light
with 15-joule flash energy
for outdoor use

- ▶ Protection degree IP 66
- ▶ Flash power 15 Joule
- ▶ Flash frequency 1 Hz
- ▶ Continuous operation



Application

The BLE 15 Strobe Light is designed for audio signals, warnings, and visual signals for indoors and outdoors. The high-powered, 15-joule flash makes the signal easily recognizable even in direct sunlight. The lamp also features a good 360° signal effect.

Design

The BLE 15 housing is made of grey, impact-resistant plastic, together with an equally impact-resistant cap in various lens colors. The stainless steel wall bracket ensures easy mounting. An integrated pressurization valve prevents water condensation inside the housing, which is otherwise a frequent problem in outdoor use. The light is available in the standard supply voltages 24 VDC as well as 230 VAC.

Signaling Device for Heavy Industry

The powerful flash energy of 15 joule makes the signal easily recognizable even in direct sunshine.




Technical specifications

Housing	Impact resistant plastic (polycarbonate)
Colour	grey
Type of protection	IP 66 acc. to IEC 60529
Cable entry	1x cable gland M20 x 1.5 / Cable diameter 5.5-13 mm 2x blind plugs M20
Connecting terminals	for conductor cross-section to 2.5 mm ² stranded conductor, 4.0 mm ² solid conductor as well as in all outdoor areas
Flash power	15 Joule
Flash frequency	1 Hz
Operating mode	Continuous operation
Weight	approx. 1 kg
Temperature range	-40°C to +50°C

Terminal room



Wall mounting

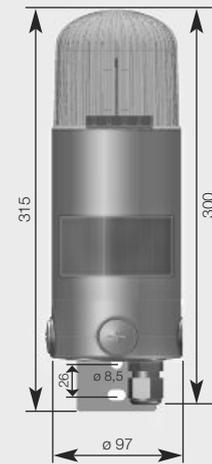

* The full article number is made up by appending the colour code for the coloured cap to the article numbers given below.

clear	01
red	02
yellow	03
green	04
blue	05

Order information

Type	Name	Connecting voltage	Power Consumption	Art. no.*
BLE 15	Strobe Light	230 VAC 50-60 Hz (-10/+6%)	0.15 A	230207 ..
BLE 15	Strobe Light	24 VDC (16-32 VDC)	0.55 A	230213 ..

Subject to change without notice · Printout 12/10