

Portable Emergency Lights with Emergency Lighting Function W 276.3/4

IP54



- Robust handheld torch with emergency lighting function (non-maintained mode)
- Housing of impact-resistant, non-abrasive plastic
- Integrated charger – connection via flexible spiral cable with EURO plug
- Including three C-washers (red, orange) for modification of light distribution and signalling
- Up to 25 h light (auxiliary light operation) and 3.5 h with full power with 4 Ah battery
- Up to 25 h light (auxiliary light operation) and 6.5 h with full power with 7 Ah battery
- Flashing light function
- High range up to 80 m at 1 lx illuminance



W 276.3/4

Housing material	impact resistant, non-adhesive plastic
Housing colour	grey
Duration of emergency lighting	3.5 h with incandescent lamp 5 V/5 W (main beam) 12.0 h with incandescent lamp 4.8 V/1.5 W (pilot beam)
Battery	rechargeable, maintenance free and gas tight NC-Accu 4.8 V / 4 Ah
Light source	Main beam 5 V / 5 W Pilot beam 4.8 V / 1.5 W
Connection voltage	230 V 50/60 Hz
Mains power supply load	10 VA
Monitoring function	Charging indication by green LED
Switch function	Flashlight, maintained light and pilot light

Ordering details

Type		Order No.
W 276.3/4	12 h/3.5 h	1 1145 000 276
W 276.3/7 LZ	25 h/6.5 h	4 0071 344 355



Accessories/spare parts

Type	Order No.
Incandescent lamp 5 V / 5 W (5 pcs.)	4 0071 345 265
Incandescent lamp 4.8 V / 1.4 W (10 pcs.)	4 0071 345 264
Rechargeable NC-Accu 4.8 V/4 Ah	4 0071 345 248
Shock-power wall mounted holder	4 0071 344 274
Wall bracket	1 1145 000 492
Mains connection lead	4 0018 031 358
Slip-on filter set red, orange and radial difuser cap	2 1145 995 000

Lighting engineering

Distance	Illumination
5 m	256 lux
20 m	16 lux
80 m	1 lux

Dimensions in mm

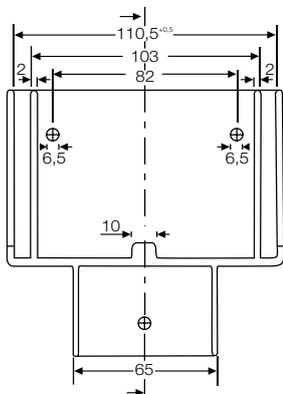

Wall bracket