


Ex-e/Ex-i terminal box

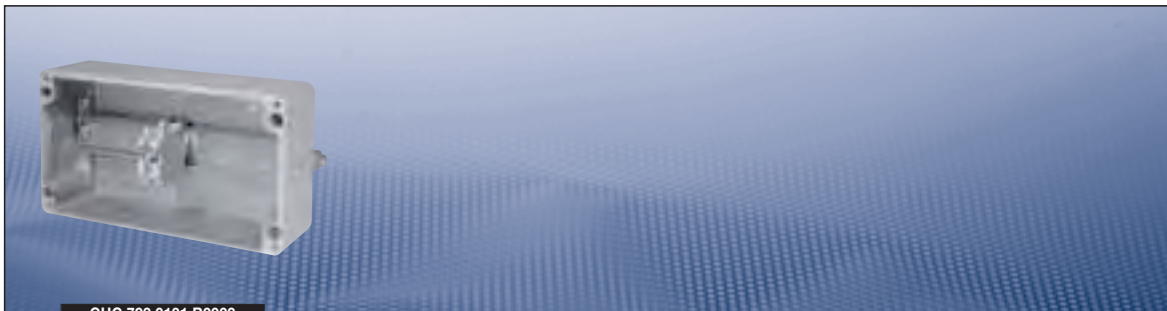

GHG 793 0101 R0003

Technical data

Type 793 01 up to 11 terminals


Marking to 94/9/EC	Ⓔ II 2 G Ex dem ia II, IIC T6 / Ⓔ II 2 D A21 IP66 T80 °C						
Permissible ambient temperature	-20 °C to +40 °C -55 °C to +55 °C (option)						
EC-Type Examination Certificate	PTB 00 ATEX 3108						
Rated voltage	up to 690 V						
Rated current	depends on terminal mounting						
Degree of EN 60529	IP66						
Enclosure material	light alloy die-casting (AlSi)						
Enclosure colour	light grey						
Terminal cross section	up to 6 mm ²						
Weight	approx. 0.68 kg						
Drillings/cable glands	M16	M20	M25	M32	M40	M50	M63
Max. number down	5	2	2	1	-	-	-
Max. number of terminals acc. to certification	2.5 mm ²		4 mm ²		6 mm ²		
	16		14		10		

Ordering details

Design	Cable gland	No. of Terminals	Order No.
Typ 793 01 up to 11 terminals with screw terminals 2 x 2.5 mm ² + PE-terminal 2 x 4 mm ²			
Ex-e	without drilling	1 x Ex-e*/1 x PE	GHG 793 0101 R0003

* according to type examination certificate individual open ended

Dimension drawing

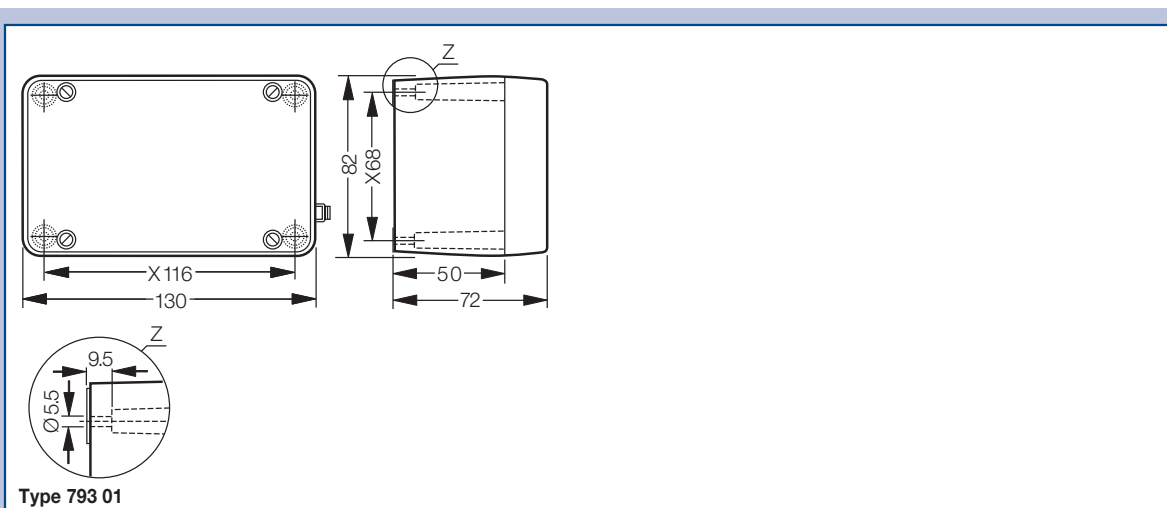

Dimensions in mm