

# PR12

IP55 halogen floodlight, suitable for outdoor lighting (up to 1500 W).



### Materials

- Body: die-cast aluminium.
- Reflector: anodised aluminium.
- Diffuser: closing tempered glass.
- Closing system: stainless steel lever (1000-1500 W) or stainless steel hardware (500 W).
- Bracket: zinc-coated steel, polyester painted finish.

### Lamps

- Linear halogen in quartz-iodine (500 W to 1500 W).
- Lampholder: R7s.  
Supplied without lamps.

### Gear

Does not accept gear.

### Installation

Bracket fixing.  
M20 cable gland.

### Certificates

Conforms to EN-60598-1 & 2-3 standard.

### TECHNICAL DATA SHEET

#### PROTECTION RATING

IP 55  
Class IK09

#### REFLECTOR

symmetrical extended

#### TECHNICAL SPEC.

230 V, 50 Hz



1 m

1000-1500 W: 0.087 m<sup>2</sup>  
max. 500 W: 0.028 m<sup>2</sup>



20 (500 W)

3 kg

#### FINISH

standard: BK9005  
 WH9010

#### CERTIFICATION

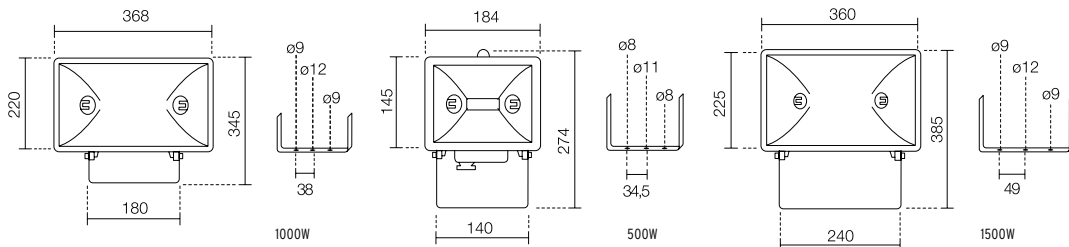

### BASE REFERENCES

LAMP (W)	PORT.	COLOUR	VU	OU	CODE	DESCRIPTION
Linear halogen max. 500 W (112 mm)		white	20	10	<b>50-70260</b>	PR12 1xCY500 R7S WH9010 GTF NG
		black	20	10	<b>50-70250</b>	PR12 1xCY500 R7S BK9005 GTF NG
Linear halogen, 1000 W		black	-	1	<b>50-70380</b>	PR12 1xCY1000 R7S BK9005 GTF NG
Linear halogen, 1500 W		black	-	1	<b>50-70381</b>	PR12 1xCY1500 R7S BK9005 GTF NG

### ACCESSORIES

ACCESSORIES	CODE	DESCRIPTION
<b>Wall arm</b> Rectangular steel tube, 20x15 mm, black, Ø120 mm base, joint Ø100 mm	500	<b>50-33451</b> ZZ WALL ARM 500 PR10/PR12
	750	<b>50-33476</b> ZZ WALL ARM 750 PR10/PR12
	1000	<b>50-33411</b> ZZ WALL ARM 1000 PR10/PR12
<b>Tube attachment clamp</b> Grey cast aluminium, for floodlight attachment to tube, Ø45 to 90 mm	<b>50-70133</b>	ZZ CLAMP TUBE PR

